
M W D®

USERS MANUAL

OBJECT 304
18-GLASS WINE RACK SET
FOR STORING WINE GLASSES


! ALWAYS CHECK THE WALL WITH A SUITABLE DETECTOR BEFORE DRILLING TO ENSURE THERE ARE NO ELECTRICAL CABLES, WATER PIPES OR OTHER CONCEALED INSTALLATIONS BEHIND THE FIXING POINTS. THE WALL PLUGS AND SCREWS SUPPLIED ARE SUITABLE FOR STANDARD MASONRY WALLS ONLY. FOR PLASTER-BOARD, CONCRETE, TIMBER OR OTHER WALL TYPES, ALWAYS USE FIXINGS SUITABLE FOR THE WALL CONSTRUCTION.

THE INSTALLER IS RESPONSIBLE FOR ENSURING THE WINE RACK IS SECURELY MOUNTED.

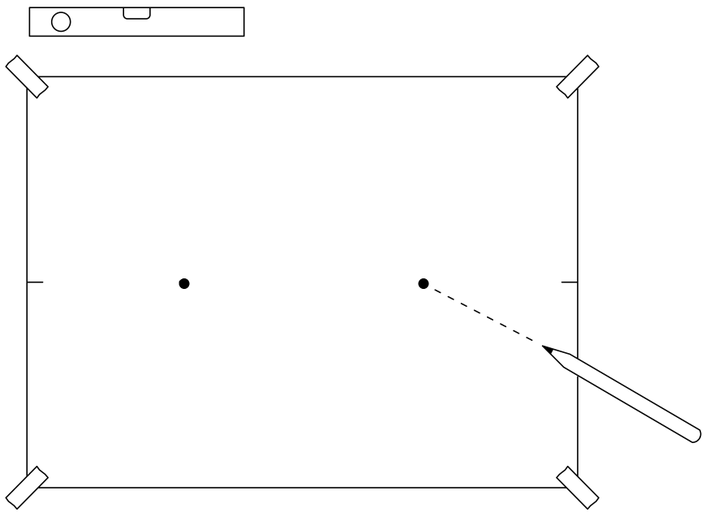


1. UNPACK THE WINE GLASS RACK.
USE THE SUPPLIED POSTER TO FIND THE DESIRED POSITION ON THE WALL.
USE A SPIRIT LEVEL OR LASER LEVEL TO ALIGN THE POSTER.
MARK THE FIXING POINTS THROUGH THE HOLES IN THE POSTER.
REMOVE THE POSTER.

302




2. DRILL Ø8 MM HOLES AT THE MARKED POSITIONS AND INSERT THE SUPPLIED WALL PLUGS AND SCREWS, LEAVING THE SCREWS SLIGHTLY LOOSE.

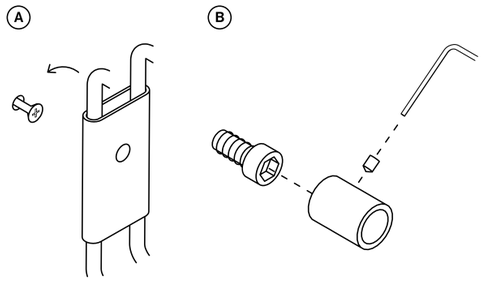


3. A - HANG THE LEFT SIDE OF WINE GLASS RACK ON THE SCREWS.

B - POSITION THE WINE GLASS RACK ON THE SCREWS AND PUSH IT FIRMLY AGAINST THE WALL.

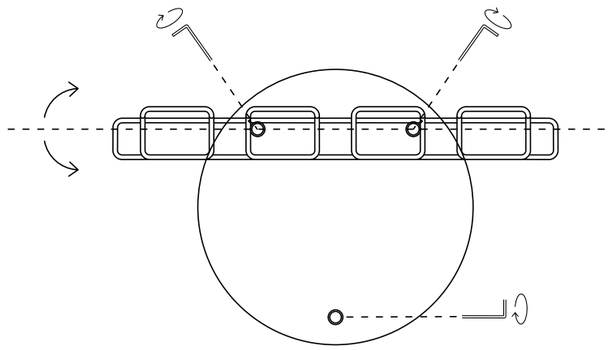


4. CHECK THAT THE RACK IS PERFECTLY LEVELED.
TIGHTEN THE SET SCREWS USING THE SUPPLIED HEX KEY UNTIL THE RACK IS SECURELY FIXED.


301



2. DRILL Ø8 MM HOLES AT THE MARKED POSITIONS AND INSERT THE SUPPLIED WALL PLUGS AND SCREWS, LEAVING THE SCREWS SLIGHTLY LOOSE.



3. HANG THE WINE GLASS RACK ON THE SCREWS.

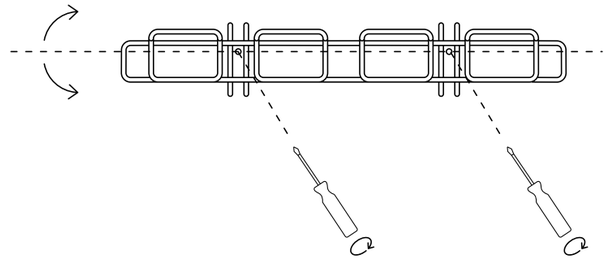

4. CHECK THAT THE RACK IS PERFECTLY LEVELED.
TIGHTEN THE SET SCREWS USING SCREWDRIVER UNTIL THE RACK IS SECURELY FIXED.